

# TRUE TOW WEIGHT DISTRIBUTION

## MIDDLEWEIGHT & HEAVYWEIGHT



"My Weigh Safe hitch is now fondly called "freight train hitch" because my travel trailer now rolls behind my truck like it's on train tracks. [...] The engineering and design of the Weigh Safe True Tow are world class. When you want the very best for the safety of your family, it's Weigh Safe or bust."

- Mark H.

## LIVE ADJUSTMENT

Built directly into the head assembly for a quicker, easier installation and on-the-go, anytime adjustments.

## BUILT-IN GAUGE

Measures **tongue weight** to ensure 10-15% of your GTW is on the tongue. Also measures **distribution weight** to confirm the load is properly distributed.

## SMART PHONE APP

A single app that has everything you need to get your hitch setup correctly. Features a calculator that provides your **distributed weight** for a truly distributed system.



## HEIGHT ADJUSTABILITY

More accurate height adjustments with 1¼" hole increments. Available in **4", 6", 8", & 10"** drop lengths and **2" & 2.5"** shank sizes to fit any towing setup!

## ANTI-SWAY PROPERTIES

Four anti-sway friction areas to help reduce trailer sway from weather conditions or passing vehicles, creating a smoother, safer and more enjoyable tow!

## TRUE DISTRIBUTION

All of these features aid in giving you a true and accurate distribution across your entire towing system.



## WEIGHT RATINGS

MAX GROSS TRAILER WEIGHT  
(BASED OFF SPRING ARM SIZE)

### MIDDLEWEIGHT

**8,500 LBS**  
**12,500 LBS**

### HEAVYWEIGHT

**18,500 LBS**  
**22,000 LBS**





# WEIGH SAFE

PRODUCT LINE



# ALUMINUM WEIGH SAFE HITCH



## FEATURES

- Built-in gauge measures tongue weight
- Aircraft-grade aluminum
- 2" & 2 5/16" stainless steel tow balls included
- Securely attaches with dual pin key lock
- Various additional keyed-alike locks available
- Optional black Cerakote finish

## AVAILABLE SIZES & RATINGS

[DROPS]	[SHANKS]	[GTW]
4"	2" -----	<b>12,500 LBS</b>
6"	2.5" -----	<b>18,500 LBS</b>
8"	3" -----	<b>21,000 LBS</b>
10"		

# STEEL WEIGH SAFE HITCH



## FEATURES

- Built-in gauge measures tongue weight
- Powder-coated steel
- 2" & 2 5/16" stainless steel tow balls included
- Securely attaches with dual pin key lock
- Various additional keyed-alike locks available

## AVAILABLE SIZES & RATINGS

[DROPS]	[SHANKS]	[GTW]
6"	2" -----	<b>15,000 LBS</b>
8"	2.5" -----	<b>22,000 LBS</b>
	3" -----	<b>22,000 LBS</b>

# STEEL AERO HITCH




## FEATURES

- Built-in gauge measures tongue weight
- Powder-coated steel
- 2" stainless steel tow ball + Clamshell Adapter included
- Securely attaches with slide lock pin
- Standard hitch pin included
- Various additional keyed-alike locks available

## AVAILABLE SIZES & RATINGS


[DROPS]	[SHANKS]	[GTW]
4"	2" -----	<b>12,500 LBS</b>
6"		
8"		
10"		



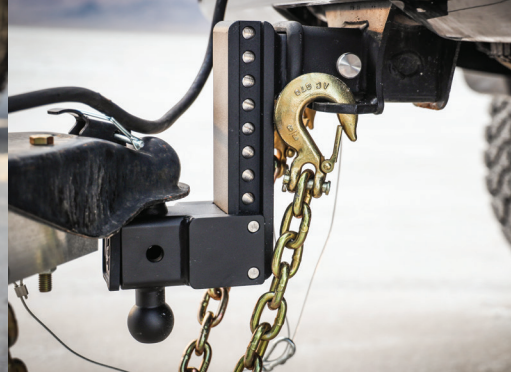

# 180

PRODUCT LINE

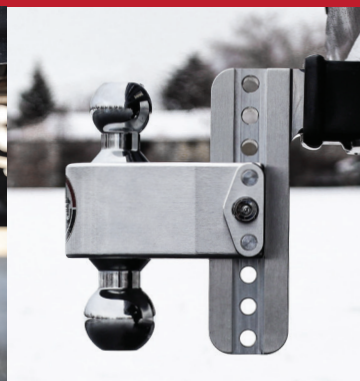

# ALUMINUM 180 HITCH



## FEATURES

- Aircraft-grade aluminum
- 2" & 2 5/16" stainless steel or chrome-plated dual-sided combo ball
- Securely attaches with dual pin key lock
- Various additional keyed-alike locks available
- Optional black Cerakote finish

## AVAILABLE SIZES & RATINGS

[DROPS]	[SHANKS]	[GTW]
4"	2"-----	12,500 LBS
6"	2.5"-----	18,500 LBS
8"	3"-----	21,000 LBS
10"		

# STEEL 180 PRO HITCH



## FEATURES

- Powder-coated steel
- 2" & 2 5/16" dual-sided combo ball
- 2" accessory receiver slot (bike rack, cargo carrier, hitch step, etc.)
- 600 lbs weight carrying capacity for 2" accessory slot
- Securely attaches with dual pin key lock
- Various additional keyed-alike locks available

## AVAILABLE SIZES & RATINGS

[DROPS]	[SHANKS]	[GTW]
6"	2"-----	15,000 LBS
8"	2.5"-----	25,000 LBS



# SAFE LOAD GOOSENECK

## PRODUCT LINE



## SAFE LOAD OEM BALL



### FEATURES

- Built-in gauge measures pin load/tongue weight
- 2 5/16" stainless steel tow ball
- Generic and RAM chain anchor pucks available
- Storage case & rubber dust cover included
- Securely attaches with key lock
- Various additional keyed-alike locks available

## SAFE LOAD BW BALL



### FEATURES

- Built-in gauge measures pin load/tongue weight
- 2 5/16" stainless steel tow ball
- Storage case & rubber dust cover included
- Compatible with B&W Turnover Gooseneck Hitch

## SAFE LOAD ISR HITCH



### FEATURES

- Dual, built-in gauges measure pin load/tongue weight
- Powder-coated steel
- 2 5/16" stainless steel tow ball
- Includes (4) rail pins with cotter pins
- Compatible with industry standard rails



### WEIGHT RATINGS

**30,000 LBS**  
GROSS TRAILER WT.

**7,500 LBS**  
MAX VERTICAL WT.



# RECOVERY

## PRODUCT LINE



### HARD SHACKLE

- **45,000 LBS** breaking strength
- 4  $\frac{3}{4}$  ton shackle working load limit
- Aircraft-grade aluminum
- Fits 2" vehicle receivers
- Shackle available in red & black



### SOFT SHACKLE RING

- **40,000 LBS** breaking strength
- 1  $\frac{3}{4}$ " ring diameter
- Aircraft-grade aluminum
- Fits 2" vehicle receivers
- Also available in red & black cerakote



### VEHICLE HOOK

- **25,000 LBS** breaking strength
- 1  $\frac{1}{2}$ " Hook opening
- Aircraft-grade aluminum
- Fits 2" vehicle receivers
- Also available in red & black cerakote



### KINETIC ROPE

- Rated up to **54,200 LBS** breaking strength
- Premium, heavy-duty nylon
- 20' or 30' length options
- Available in  $\frac{5}{8}$ ",  $\frac{7}{8}$ ", 1", & 1  $\frac{1}{4}$ " diameters
- $\frac{1}{2}$ " diameter soft shackle available

# ACCESSORIES



## KEYED-ALIKE LOCK OPTIONS

- A. Padlock (WS12)
- B. Dust Lock Cover (WS08)
- C. Dual Pin Key Lock (WS03)
- D. Trailer Coupler Latch Lock (WS11)
- E. Hitch Locking Pin (WS05)
- F. Trailer Coupler Ball Lock (WS22)



## CLAMSHELL ADAPTER

- Converts 2" tow ball to 2 5/16"
- Fits *most* 2" generic tow balls (any brand)
- Stainless steel construction
- Swivels to reduce wear and tear
- Max GTW matches 2" tow ball rating
- Comes with storage bag

