


FLAP JACK

BY **Weigh Safe!**
TRAILER HITCHES

WHAT'S INCLUDED

- A. Landing Pad (x2)
- B. Flap Assembly (x1)
- C. Storage Case (x1)

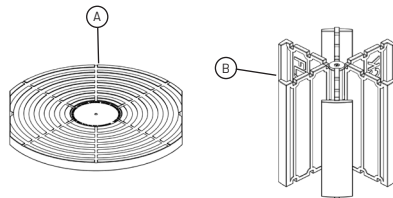


**INSTRUCTIONAL
VIDEO**



INSTRUCTIONS


STEP 1

Separate both Landing Pads (Part A) from Flap Assembly (Part B).

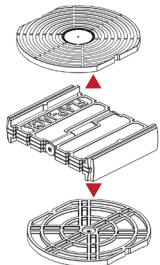


STEP 2

Place (1) Landing Pad flat on the ground with magnets facing up.




STEP 3

Open Flap Assembly by holding outside flaps and pulling in opposite directions.




STEP 4

Snap Flap Assembly onto Landing Pad, ensuring slots line up.

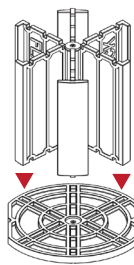


STEP 5

Snap second Landing Pad on top of Flap Assembly with magnets facing down. Ensure slots line up.



STEP 6

Secure wheel chocks. Place assembled Flap Jack under tongue jack (or stabilizer feet) on level ground. Lower tongue jack onto center of Flap Jack.

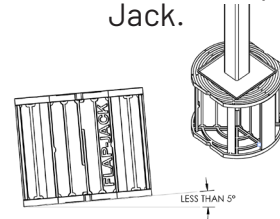

TAKE DOWN

- 1) Firmly pull on both Landing Pads to remove them from the Flap Assembly.
- 2) Fold down Flap Assembly until flat.
- 3) Place a Landing Pad on either side of folded Flap Assembly by aligning the tabs.
- 4) Place Flap Jack into Storage Case.

MAINTENANCE

- Keep Flap Jack clean and free from dirt and debris.
- Store Flap Jack in provided Storage Case.

WARNING IMPROPER USE MAY RESULT IN SERIOUS INJURY OR DEATH

FAILURE TO FOLLOW THESE WARNINGS COULD CAUSE UNSTABLE CONDITIONS THAT COULD CAUSE THE FLAP JACK TO TIP OVER, BEND OR BREAK. IMPROPER USE MAY RESULT IN PROPERTY DAMAGE, INJURY OR DEATH.

- **ALWAYS** have wheel chocks in place when using the Flap Jack.
- **ALWAYS** make sure the trailer tongue jack and stabilizer feet are lowered in the **CENTER** of the Flap Jack. Failure to do so can result in unstable conditions.
- **ONLY** use Flap Jack on level ground ($\leq 5^\circ$ from perfectly level).
- **ALWAYS** inspect each component for damage prior to use. **DO NOT** use if damaged.
- **NEVER** stack Flap Jacks.
- **NEVER** throw or toss Flap Jack.



QUESTIONS OR CONCERNS?
Contact our Customer Support team!

Call or text us at 801.820.7020
Email us at customersupport@weigh-safe.com