

# SAFE LOAD

BW Insert Gooseneck Ball

Why be kinda safe?  
When you can be  
**Weigh Safe!**

## INSTALLATION INSTRUCTIONS



**Rated For 30,000 GTW & 7,500 Max Vertical Weight**

WARNING: NEVER EXCEED YOUR TOW VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY

Item #	Part #	Part Description	QTY
1	WSG03	Safe Load BW Insert Gooseneck Ball	1
2	WSG04	WS Rubber Cap	1
3	WSG11	Red Storage Case	1

## WARNINGS

The Safe Load BW Insert Gooseneck ball is for personal, non-commercial use only.

Responsibility falls on the driver to properly adjust the towing equipment and to adjust his or her driving habits to account for the trailer requirements, the towing conditions, and the road conditions. The driver alone is responsible for their own safety and the safety of any passengers in the vehicle.

Thoroughly read, understand, and follow all safety warnings, setup, use and maintenance instructions of your tow vehicle, trailer and towing/hitching equipment prior to installing your hitch and before towing your trailer.

Even if a dealer installed your gooseneck hitch, verify that the ball is properly inserted and secured prior to your trip.

**ALWAYS** verify adequate turning clearance between the truck cab/bed corners and trailers. Ensure there is a minimum of 6" of clearance between the bottom of the trailer overhang and the top of the truck bed sides.

**ALWAYS** inspect all Safe Load BW Gooseneck Ball components to ensure everything is installed properly and secure prior to each trip. Do NOT tow your trailer until all components have been checked.

**ALWAYS** use a tow ball size that matches your trailer's coupler size and double check to make sure the tow ball and trailer coupler are properly and securely joined prior to towing.

**ALWAYS** ensure trailer chains are securely attached to safety attachments.

**ALWAYS** verify that safety chain length has just enough slack to allow a full turning radius without interference but not too much slack.

**ALWAYS** load the contents of a trailer correctly and properly. Follow tow vehicle and trailer manufacturer's recommendations for quantity and placement of cargo.

**NEVER** tow more than one trailer at a time as this may cause loss of control.

**NEVER** tow until your hitch is properly installed.

**NEVER** exceed the weight rating specified for the tow vehicle, trailer, hitch, tow ball, or any other towing equipment.

**NEVER** cut, weld, grind, bend, or modify any of the hitch components in any way. meets or exceeds the Gross Vehicle Weight (GVW) requirements for your specific trailer.

## INSTALLATION

**STEP 1:** Unlatch the B&W Turnover Gooseneck Hitch ball pin to the unlocked position to allow you to insert the Gooseneck Ball.

**STEP 2:** Insert your Safe Load BW Insert Gooseneck Ball into the receiver tube with the gauge facing the desired direction. We recommend facing the gauge towards the rear so it can be easily viewed while the trailer tongue is being lowered. Lock the ball pin by latching the B&W Turnover Gooseneck Hitch handle. Always double check to make sure that the lock engages and the ball is secured.

## REMOVAL & STORAGE

To remove the Safe Load BW Insert Gooseneck Ball, unlatch the B&W Turnover Gooseneck Hitch ball pin to the unlocked position. Lift the tow ball out of the receiver tube and return the ball pin the the locked position.

When not in use, store your Safe Load BW Gooseneck Ball in the provided case where it will be protected from weather conditions and insert the rubber cap into its place over the receiver to prevent dirt and debris from getting inside.

## MAINTENANCE

Always keep your Safe Load BW Gooseneck Ball clean and the corners lightly greased to ensure easy insertion/removal.

To ensure easy and proper function, remove any dirt or debris from your B&W Turnover Gooseneck Hitch receiver tube prior to inserting the Safe Load BW Gooseneck Ball.

# LIMITED WARRANTY

\*\*\*TO OBTAIN BENEFITS of this warranty you MUST: REGISTER ON LINE (within 30 days of original date of purchase)

Weigh Safe, LLC warrants to the original buyer of this Weigh Safe® (the "product") that —under normal and ordinary use and service—the product will be free from defects in materials and workmanship. If the product includes a latent defect, the product will be repaired or replaced at Weigh Safe's option. Proof of purchase required. Register your product at [www.weigh-safe.com](http://www.weigh-safe.com) within thirty (30) days of purchase to guaranty warranty service and to receive product updates.

This warranty does not cover normal wear and tear and also does not apply to any product (i) beyond its expected useful life; (ii) that has been modified or altered; (iii) damaged as a result of improper installation, improper maintenance, or unreasonable use including, without limitation, loading the product beyond its factory-rated load capacity; (iv) damaged in a collision; or (v) that has suffered any other damage.


The Company shall not be liable for any consequential, incidental, indirect, penal, or special damages arising out of any act or failure to act, even if the Company has been advised of or has foreseen the possibility of such damages. Customer assumes all risk of injury resulting from use of the product.

EXCEPT AS EXPRESSLY SET FORTH IN THIS LIMITED LIFETIME WARRANTY, THE PRODUCT IS SOLD "AS IS" WITH ALL FAULTS AND WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.


For warranty service, Customer must first contact the Company and obtain a return authorization number, then return the product to the Company, at Customer's expense. Customer will be responsible to pay any labor costs and all shipping charges to return the product to Customer.

Contact Customer Service at (801) 820-7020 or [returns@weigh-safe.com](mailto:returns@weigh-safe.com).

## Towing Peace of Mind

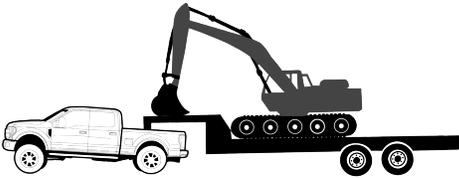


DON'T BE THIS GUY WITH  
**TOO MUCH**  
TONGUE WEIGHT

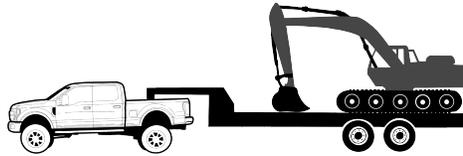

OR THIS GUY WITH  
**TOO LITTLE**  
TONGUE WEIGHT



BECAUSE YOU MIGHT END UP WITH  
**YOUR LIFE AT RISK**  
LIKE THIS GUY

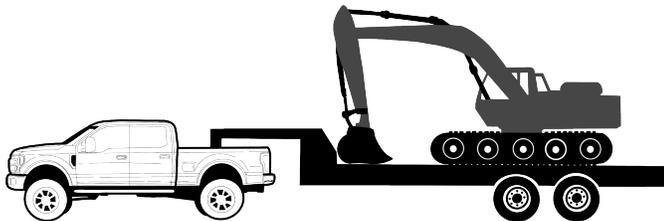

BE THIS GUY WITH  
**PROPER 15-25%**  
TONGUE WEIGHT

## CHECK OUT OUR OTHER PRODUCTS!



SCAN ME!



TRUE TOW WEIGHT DISTRIBUTION



ALUMINUM WEIGH SAFE  
DROP HITCH



STEEL WEIGH SAFE  
DROP HITCH



Weigh Safe, LLC.  
420 N Geneva Road  
Lindon, Utah 84042

801.820.7020  
[support@weigh-safe.com](mailto:support@weigh-safe.com)  
[www.weigh-safe.com](http://www.weigh-safe.com)